



# CONFORTO

# INDIRECT HOT WATER HEATERS

## H2O SINGLE COIL STAINLESS STEEL



- Easy to install
- All connections on top
- Low pressure drop
- Magnesium anode rod
- Smooth stainless steel coil
- Welded stainless steel cold water dip tube (factory installed)
- Minimal standby losses
- Limited Lifetime Residential Warranty (5-Year Commercial)
- Stainless steel aquastat well, T & P and drain valve (factory installed)
- Domestic Hot Water Temperature Control Included



**GRANBY**  
HEATING PRODUCTS

# PRODUCT SPECIFICATIONS

## INDIRECT HOT WATER HEATERS SINGLE COIL STAINLESS STEEL


### RATINGS

Model	Storage	Coil	Dimensions			Piping NPT	
	Capacity (Gallons)	Heating Surface (Square Feet)	Height (Inches)	Diameter (Inches)	Weight (lb)	DHW In/Out (Inches)	Boiler Water In/Out (Inches)
H2OI40GH	40	7.7	44.0	23.5	100	3/4	1
H2OI50GH	50	8.2	54.0	23.5	110	3/4	1
H2OI60GH	60	8.6	62.0	23.5	125	3/4	1


NOTE: Max. Tank Working Pressure 150 psi all models. Max. Coil Working Pressure 90 psi all models.

Model	Max First Hour Rating GPH @		Continuous Rating GPH @		Output Needed	Water Flow Through Coil	Pressure Drop Through Coil
	140°F	115°F	140°F	115°F	Btu/h	GPM	FT Water
H2OI40GH	221	292	185	256	139,000	14	5.9
H2OI50GH	223	291	178	246	133,000	14	6.2
H2OI60GH	262	342	208	288	156,000	14	6.4

NOTE: All ratings are based on 200°F boiler water supply and 50°F cold water inlet.

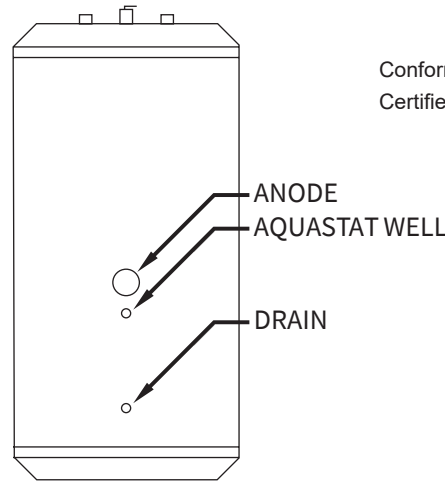

Conforms to UL STD 174  
Certified to CAN/CSA STD C22.2 No. 110-94

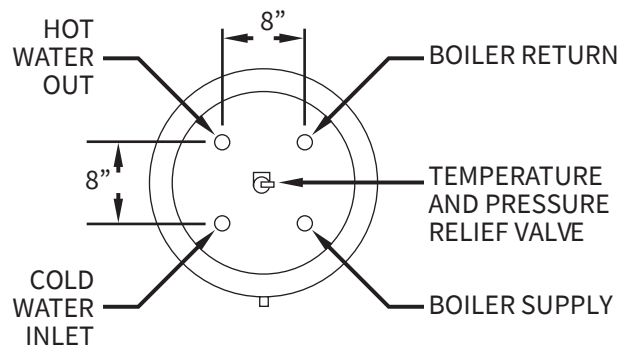

ECR International, Inc. 2201 Dwyer Avenue, Utica, NY 13501  
Tel. 800 253 7900  
www.ecrinternational.com



All specifications subject to change without notice.  
©2022 ECR International, Inc.  
Rev. [03/29/22]